

HMI with 10.1" WVA Display



Характеристики

10.1" 1024 x 600 пикселей ЖК-дисплей, Светодиодная подсветка

Естественное охлаждение


COM2 RS-485 2W MPI 187.5K

NEMA4 / IP65

Экран	10.1"	(WVA)
	1024 x 600	
	(cd/m ²)	350
		1000:1
		50,000
		16.7M
	(T/B/L/R)	89/89/89/89
	(mm)	0.2175 (H) x 0.2088 (V)
Сенсор	4-	(X)±2%, (Y)±2%
Память	256 MB	
	128 MB	
Процессор		RISC
Порт ввода/вывода	SD Card Slot	N/A
	USB Host	USB 2.0 x 1
	USB Client	N/A
	Ethernet	10/100 Base-T x 1
	COM Port	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*
	RS-485 Dual Isolation	N/A
	CAN Bus	N/A
	HDMI	N/A
Audio Output	N/A	
ЧРВ		
Питание		24±20%VDC
		510mA@24VDC
	U	500VAC (1 min.)
		Exceed 50MΩ at 500VDC
Спецификация	Enclosure	N/A
	Dimensions WxHxD	271 x 213 x 36.4 mm
	Panel Cutout	260 x 202 mm
		. 1 kg
Environment	Protection Structure	NEMA4 / IP65
	Storage Temperature	-20° ~ 60°C (-4° ~ 140°F)
	Operating Temperature	0° ~ 55°C (32° ~ 131°F)
		10% ~ 90% ()
Сертификат	CE	CE
ПО	EasyBuilder Pro	V6.08.01
	Weincloud	EasyAccess 2.0 ()

*Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.

Dimensions

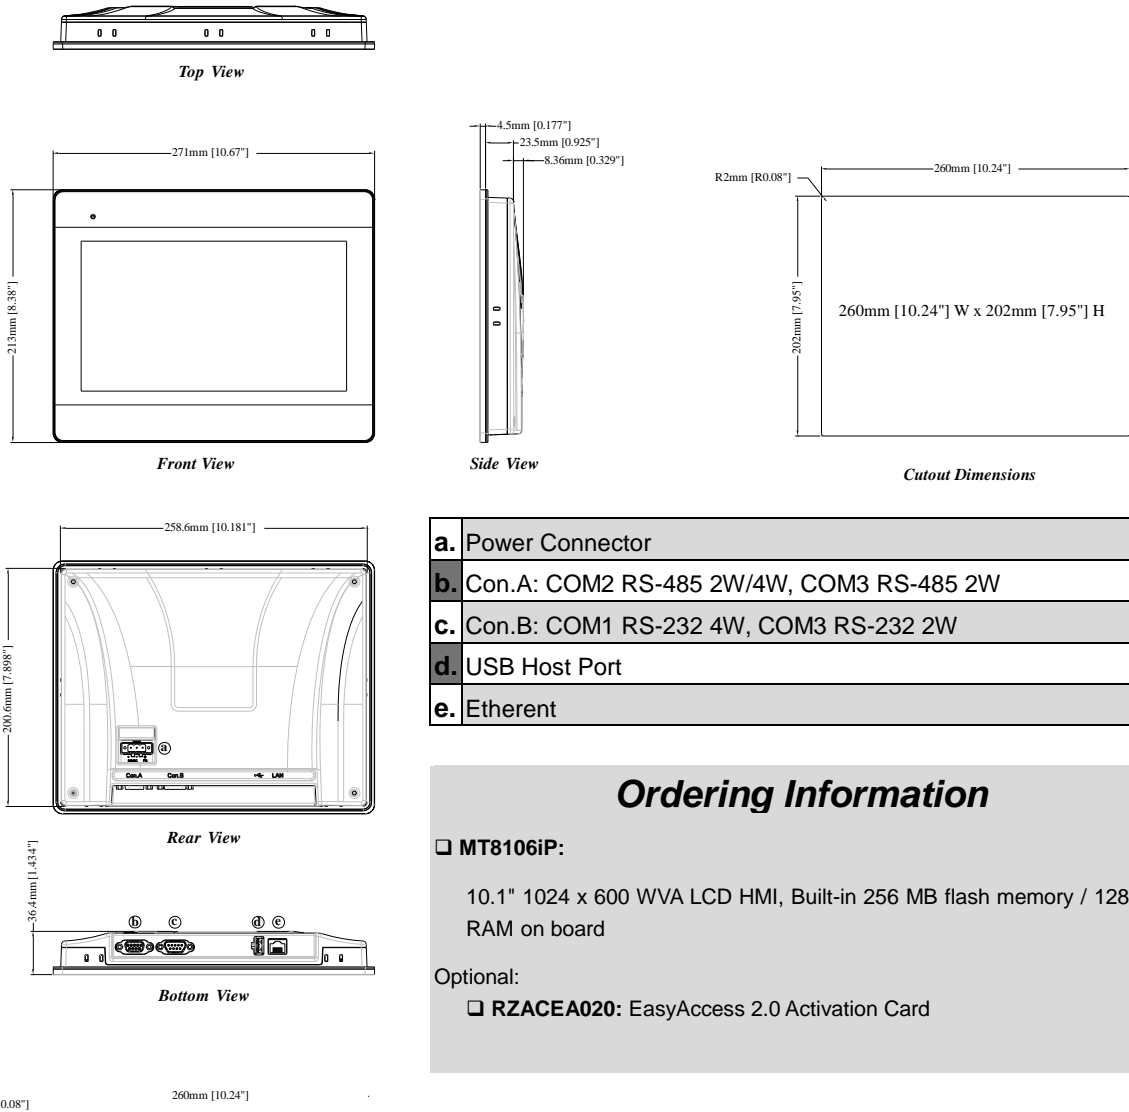

a.	Power Connector
b.	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W
c.	Con.B: COM1 RS-232 4W, COM3 RS-232 2W
d.	USB Host Port
e.	Ethernet

Ordering Information

- MT8106iP:**
10.1" 1024 x 600 WVA LCD HMI, Built-in 256 MB flash memory / 128 MB RAM on board
- Optional:
 - RZACEA020:** EasyAccess 2.0 Activation Card

Pin Assignment:

Con.B: COM1 / COM3 [RS232] 9 Pin, Male, D-sub

PIN#	COM1 [RS232]4W	COM3 [RS232]2W
1		
2	RxD	
3	TxD	
4		
5	GND	
6		
7	RTS	TxD
8	CTS	RxD
9	GND	

Con.A: COM2 / COM3 [RS485] 9 Pin, Female, D-sub

PIN#	COM2 [RS485]2W	COM2 [RS485]4W	COM3 [RS485]2W
1	Data-	Rx-	
2	Data+	Rx+	
3		Tx-	
4		Tx+	
5	GND		
6			Data-
7			
8			
9			Data+